



## LDP-VRM 016-09


### Laser Diode Driver



- Analog modulation dc .. 150 kHz
- Output current: 0 .. 1.65 A
- High speed
- Adaptive DC/DC converter

### Technical Data\*

Output current	0 .. 1.65 A
Max. compliance voltage	One SLD device
Current noise	< 3 %
Current overshoot	< 5 %
Analog modulation	180 kHz typical 150 kHz guaranteed
Current settling time (full-scale)	
Current setting input	0 .. 5 V
Current monitor	165 mV/A
Trigger	Analog / TTL (jumper)
Supply voltage	9 .. 15 V
Power dissipation	< 3.2 W
Dimensions in mm	21 x 31 x 15
Weight	10 g
Operating temperature	0 to +55 °C

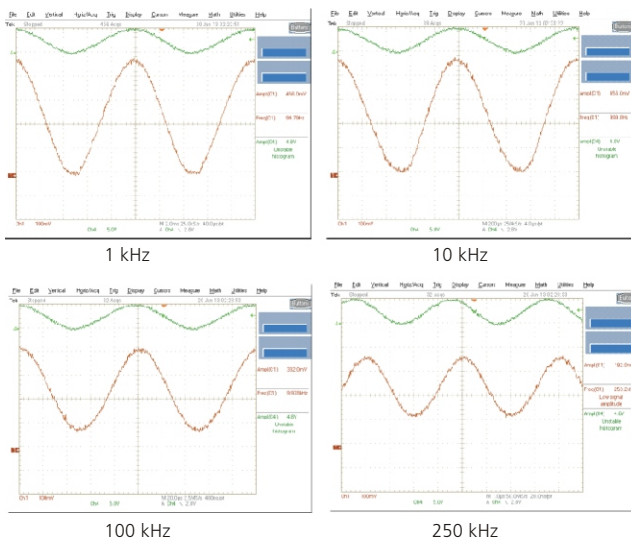

\* Specifications measured with a fast recovery diode instead of a laser diode. Technical data is preliminary and subject to change without further notice.

### Product Description

The LDP-VRM 016-09 is a fast driver for typical laser diodes. With its high output voltage it is suitable for IR, blue Ld's and all kinds of LED's. The internal DC/DC converter stabilizes the voltage drop across the driving MOSFET to prevent excessive losses.

- Innovative current regulation concept actively prevents laser diode from overshoots and overcurrent
- Protection against transients through regulated current rise time
- Adaptive DC/DC converter for lowest losses

Optional Accessories: None