



# NONLINEAR CRYSTALS PIONEERS





## ABOUT RAICOL CRYSTALS

Raicol Crystals produces high quality nonlinear optical crystals and electro-optic devices for laser systems in the medical, military, industrial, and aerospace industries.

With more than 90 employees, Raicol is a privately owned technology company that boasts a dynamic and energetic team of experts in crystal science and technology.

Our staff consists of experienced technicians and production personnel, a strong scientific and technical team, and a team of marketing professionals who are experienced in translating academic research into commercial manufacturing.

The company has achieved ISO 9001 certification through rigorous quality control over crystal growth and throughout the fabrication process.

### Our products

Electro Optical Cells: RTP, KRTP, BBO

Frequency conversion elements:

- KTP for SHG and OPO
- HGTR KTP for High Power SHG
- Super Polished LBO for SHG and THG
- BBO for frequency conversion
- PPKTP / PPLN For SPDC  
& Quantum Applications



Raicol Ltd. has ISO 9001 certification, meeting high global standards for quality control. We are also NASA certified.



## Table of contenet

Our Production Site	3-4
---------------------	-----

Raicol's in House Testing Capabilities	5-6
--	-----

RTP EO Cells	7-10
--------------	------

iRTP Pockels Cell	11-12
-------------------	-------

Super Polished LBO Crystals	13-16
-----------------------------	-------

KTP Crystals	17
--------------	----

KTP OPO Crystals	18-19
------------------	-------

HGTR KTP Crystals	20-21
-------------------	-------

KTP Types-Specifications Comparison	22
-------------------------------------	----

PPKTP Crystals	23-24
----------------	-------

BBO Crystals and EO Cells	25-26
---------------------------	-------



B02

2.5



# OUR PRODUCTION SITE

We have a 3,500-square meter facility with over 200 crystal growth stations equipped with the latest technology:

Our proprietary growth systems, state of the art cutting and polishing machines, clean rooms, unique measurement and testing equipment, and optical assembly capabilities are just some of the things we offer.

## **Raicol Crystals - From growth to optical assembly.**

Raicol offers a one-stop-shop for all your needs with the highest quality.



# RAICOL'S IN HOUSE TESTING CAPABILITIES

We have high-end internal testing capabilities:

- Low and high power absorption tests
- Laser Damage Threshold
- Interferometer for roughness and flatness measurements
- XRD
- Spectrophotometer
- Wave Front Distortion
- Microscopy quality tests
- Temperature stability tests

Using advanced equipment and expertise, we are able to achieve maximum quality and reliability for each and every product we manufacture.



# RTP EO Cells

Used for electro-optics applications, RTP crystals offer superior properties for users in the Aerospace, Defense, Medical, Industrial, Civil and Scientific applications.

RTP EO Cells are assembled in a thermally compensated double-crystal configuration, in which two matched crystals are placed in line of the propagation axis (X or Y) with one rotated by 90 degrees (general drawing below).


## Common Applications

Q Switches | Pulse pickers  
Phase modulators | Amplitude modulators  
Cavity dumpers | Shutters  
Attenuators & Deflectors


## Advantages

- Low half-wave voltage for EO Cells to enable a compact design
- Rise time, fall time, and pulse width < 1 ns which enables fast operation
- Designed to operate at a wide temperature range (-50° C to 70° C)
- High laser-induced damage threshold (up to 1GW/cm<sup>2</sup>, @1064 nm, 10 ns pulse)
- Minimal ringing, compatible for 1 MHz repetition rate
- Non-hygroscopic, easy handling, no cover needed
- The best material in the spectral range of 500-3000 nm for electro-optics applications
- Very low absorption losses @1064 nm wavelength
- Extremely high homogeneity: up to 15× 15 mm<sup>2</sup> EO cells as a standard size

## RTP EO Cell Structure

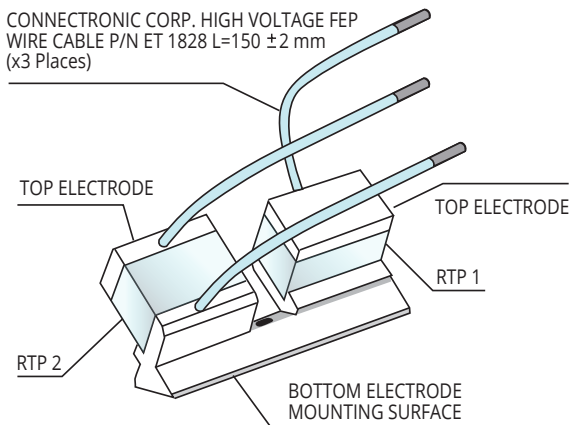



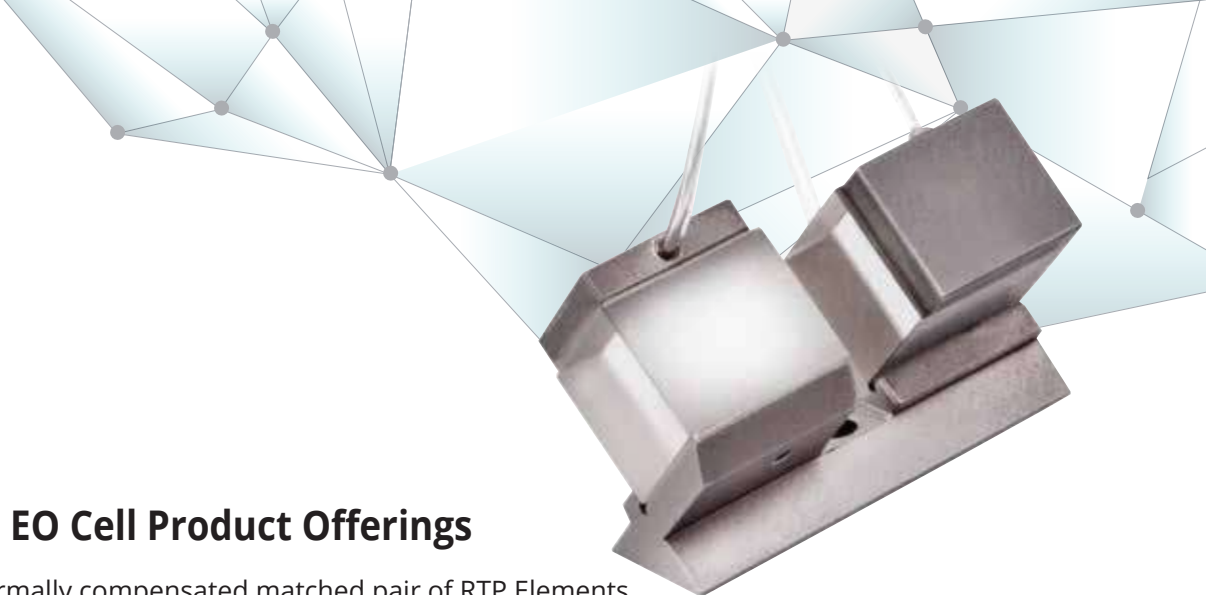

## RTP EO Cell Product Offerings

- Thermally compensated matched pair of RTP Elements
- Single RTP Element (used for phase modulators)
- Plug and play, Electro-optical cells assembly (with / without housing)

## Typical Specifications for RTP EO Cells


Operational Range	500-3000 nm
Transmission @1064 nm	> 99%
Half Wave Voltage	3.6 kV (for EO Cell size: 9× 9×10 mm <sup>2</sup> )
Extinction Ratio	Up to 30 dB
Clear Aperture	1.5×1.5 mm <sup>2</sup> to 15×15 mm <sup>2</sup>
Crystal Length	Up to 50 mm
Acceptance Angle	< 4 deg.
Standard AR Coating @1064 nm	R < 0.2%
Laser Induced Damage Threshold	Up to 1 GW/cm <sup>2</sup> , @1064 nm, 10 ns pulse or 10J/cm <sup>2</sup>

## Raicol's RTP Benefits

- Low half-wave voltage to enable a compact design
- High Damage Threshold (600MW/cm<sup>2</sup> in typical value 1GW/cm<sup>2</sup> )
- High Extinction Ratio (ER) up to 30-35 dB
- No acoustic ringing up to MHz regime
- Wide acceptance angle
- Suitable for Military and Space application due to it's wide temperature stability (-50° C to 70° C)
- Non-hygroscopic material
- Low electrical conductivity – Rise time / fall time < 1ns

## EO Cells – Crystals Comparison

Properties	LiNbO <sub>3</sub>	RTP X-cut
Half Wave Voltage @1064 nm for L=d (kV)	9	8
Dielectric constant $\epsilon$	27.9	11
Average Power Density (W/cm <sup>2</sup> )	150	300
Laser Induced Damage Threshold (MW/cm <sup>2</sup> )	280	> 600
Available Aperture (mm <sup>2</sup> )	>8x8	2x2 to 15x15
Extinction Ratio (dB)	>23	23-35
Temperature Stability *Pyro electric effect	Not stable at T<-20° C	-50° to 70° C
Acoustic Ringing	10 Khz	>1 MHz
Hygroscopic	No	No
Mechanically Stable	Medium	Good

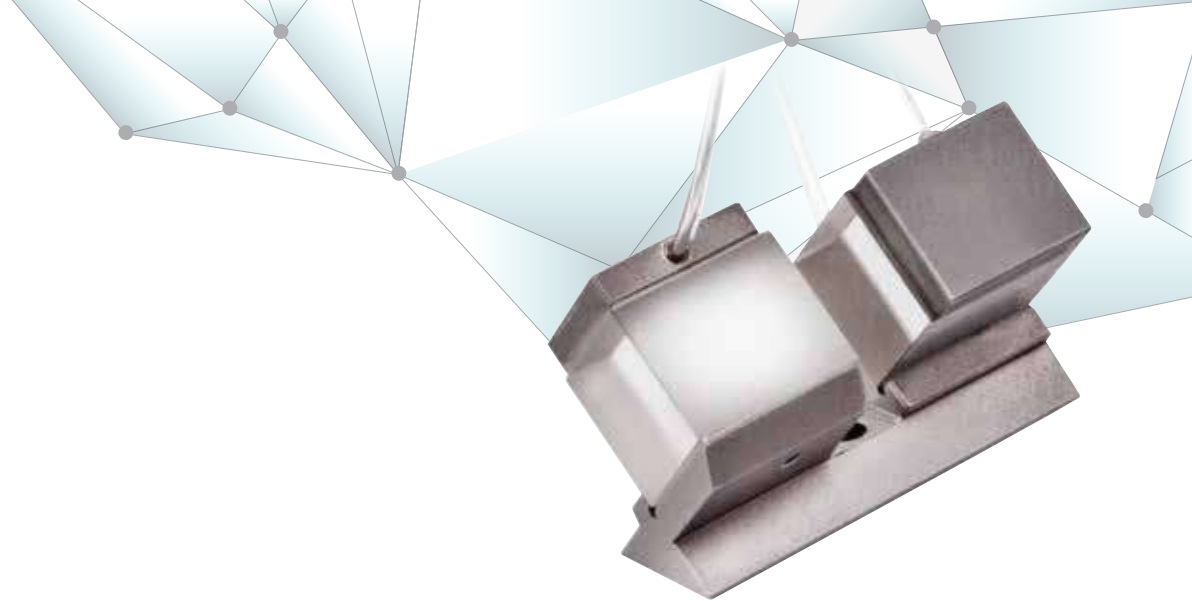

RTP Y-cut	KRTP	KD*P	BBO
6.5	7	9	48
11	11	48	8
200	800	250	>1,000
600	600	500	>1,000
2x2 to 6x6	2x2 to 6x6	5x5 to 20x20	1x1 to 12x12
23-30	23-30	23-30	>30
-50° to 70 °C	-50° to 70 °C	Not stable	Good
>1 MHz	>1 MHz	10 KHz	25 KHz
No	No	Yes	Yes
Good	Good	Low	Good

# iRTP

## Pockels Cell

RTP belongs to the KTP crystal family. The outstanding Electro-Optical properties of RTP, together with its high damage threshold, make it a perfect solution for high-end laser applications. It is ideal for applications that require advanced characteristics, such as non-hygroscopic, high thermal stability, and high-repetition rates.

Raicol's new iRTP Pockels Cell (PC) is the first product that brings the advantages of RTP to the EO mass market. iRTP PC is a modified version of Raicol's RTP, designed specifically for industrial laser applications. Raicol's iRTP PC is a standard off-the-shelf solution that offers high performance EO cells at the price of standard industry PCs.

### Raicol's iRTP PC Features

- High laser damage threshold
- Fast rise-fall time and pulse width
- Non-hygroscopic material
- Low absorption losses
- No acoustic ringing (up to at least 350kHz)
- Thermal stability over a wide operational temperature range (10°C -50°C)





## Raicol's iRTP PC Specifications:

IRTP Parameters			
Aperture	6x6mm	8x8mm	10x10mm
Capacitance	< 6pf		
HWV V ( $\lambda/2$ ) (@1064)	3.3 KV		
Optical transmission	>99%		
ER (@1064)	27 dB		
Damage threshold	typically, > 1GW/cm <sup>2</sup>		
Alignment access	1 axis alignment		
Housing Dimensions	Round: $\varnothing$ 35 mm, Length 35 mm. (there is a 1" design). Square: 35mmx35mmx35mm		
Rise time	<1 ns		
Thermal stability	10 - 50 Deg.		

# LBO Crystals

LBO (Lithium Triborate  $\text{LiB}_3\text{O}_5$ ) is a nonlinear optical crystal ideally suitable for various nonlinear optical applications. LBO crystals combine wide transparency, moderately high nonlinear coupling, high damage threshold and good chemical and mechanical properties.


## Special Advantages of our LBO

- Super polished elements for excellent surface quality: roughness  $< 3\text{\AA}$  RMS and scratch dig 2/1
- Very low bulk absorption: up to 2ppm/cm @1064nm
- Crystal size up to 50x50 mm<sup>2</sup> and maximum length of 50 mm
- Strict quality control

## Our LBO features

- Wide transparency range (160nm – 2600nm)
- Relatively high nonlinear coefficient
- High damage threshold
- Type I and II phase matching in a wide wavelength range
- High optical homogeneity
- Wide acceptance angle and small walk-off angle

## ROUGHNESS MEASUREMENTS BY ZYGO INTERFEROMETER

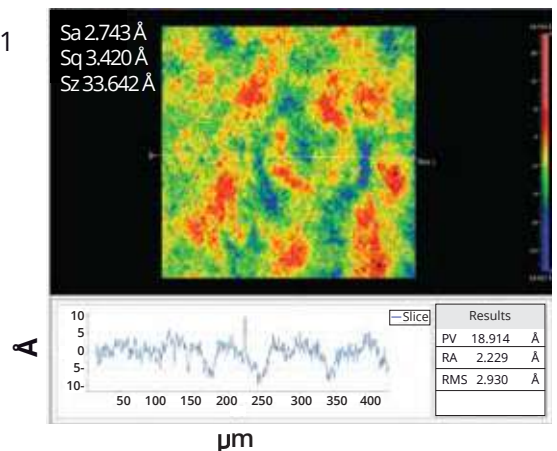

## Common Applications

- Second and third harmonic generation of high power diode pumped Nd:YAG and Nd:YLF lasers, Alexandrite, Ti:Sapphire, Dye lasers and ultrashort pulse lasers
- OPCPA




**SUPER  
POLISHED!**

## Typical Specifications for LBO

Apertures	Up to 50x50 mm <sup>2</sup>
Length	Up to 50 mm along x axis
Flatness	Up to $\lambda/10$ @1064nm
Roughness	<3Å RMS
Parallelism	Up to 5 arc sec.
Perpendicularity	Up to 5 arc min.
Scratch/Dig	2/1 up to 0/0 per custom demand
AR Coatings	Dual band R < 0.1%
Absorption Coefficient	<Bulk (1064nm) = 2-4 ppm/cm <Surface (1064nm) = 1-2 ppm <Bulk (532nm) = 8ppm/cm <Surface (532nm) = 1-2 ppm
Wave Front Distortion	$\lambda/8$ @633 nm
Laser induced Damage Threshold	800 MW/cm <sup>2</sup> @1064 nm 500 MW/cm <sup>2</sup> @532 nm 300 MW/cm <sup>2</sup> @355 nm For 10 ns pulses

**Surface absorption performed @532nm on LBO crystal AR coated @1064/532nm**

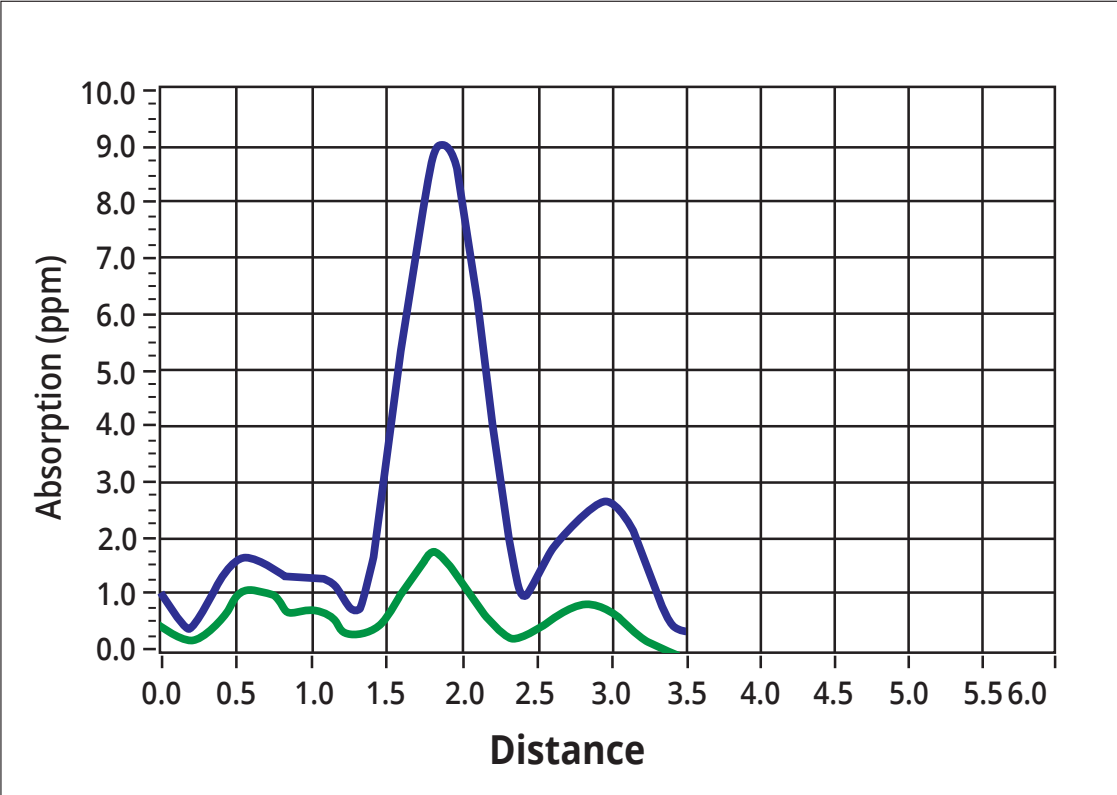

- Standard LBO Crystal
- Super Polished LBO Crystal






**SUPER  
POLISHED!**

Graph clearly highlights that surface absorption at 532nm performed on coated LBO Superpolished crystal (roughness  $<3\text{\AA}$ ) absorbs 4 times less than standard polished coated LBO crystal (roughness of  $\sim 10\text{\AA}$ ).

Based on this difference, LBO Superpolished crystals made at Raicol should exhibit longer lifetime, and withstand higher powers.

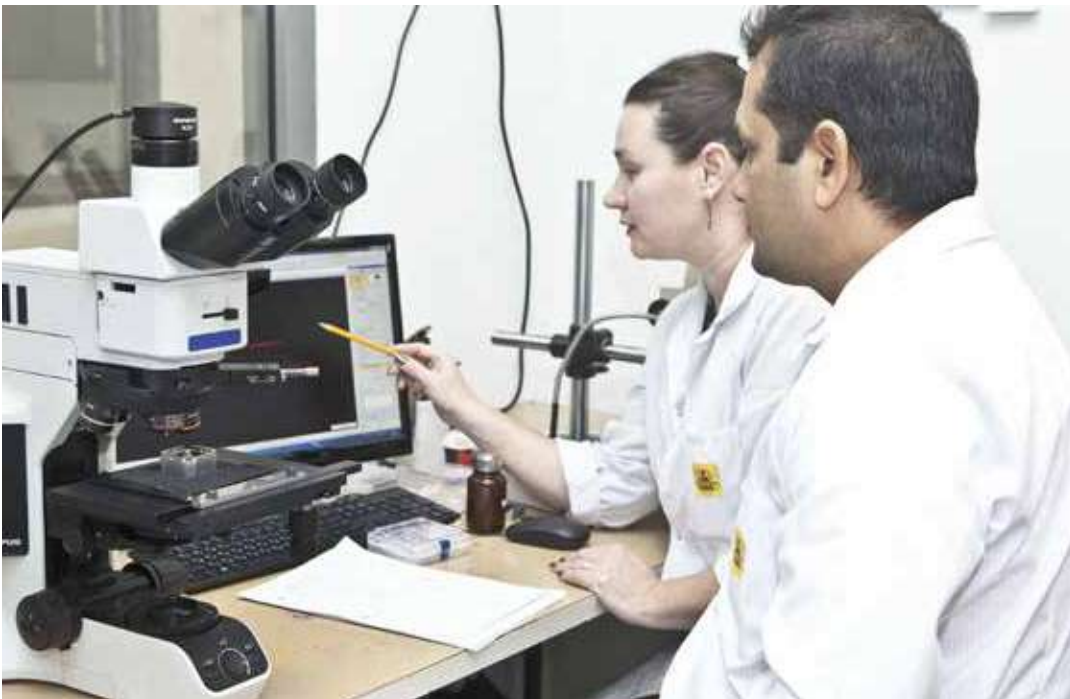

# KTP Crystals

## **KTP (Potassium Titanyl Phosphate, $\text{KTiOPO}_4$ )**

KTP is the most common NLO crystal for SHG of YAG lasers

- SHG coefficient is approximately three times higher than KDP
  - High Laser damage threshold
  - Excellent thermal stability
  - Large aperture up to 50x50 mm
- 

**KTP material is widely recognized for efficient OPO, SHG & Quantum applications.**



# KTP OPO Crystals

KTP OPO (Optical Parametric Oscillator) is the most efficient material for converting 1064 nm wavelength laser to 1572 nm ("eye safe") and other wavelengths.



---

## Advantages

- Aperture – up to 30x30 mm<sup>2</sup>
- Length – up to 40 mm
- Available in Regular, Monolithic (Single and Double pass with Mirror coating), Plano-Plano and Confocal OPO configurations
- NCPM for eye-safe signal (1572 nm) No Walk-Off
- Efficiency of Monolithic OPO is 20-30% higher than a typical OPO
- Divergence of Laser with Confocal OPO is lower than Plano-Plano OPO
- Walk-Off Compensating design (WOC) available at 2.1µm

## Common Applications

- Laser Range Finders (LRF)
- Laser designators
- Other civil, LIDAR and space applications

# HGTR KTP

## High Gray Track Resistance Crystals

Raicol was the first to develop High Gray Track Resistance flux grown KTP crystals that enables higher average power density in SHG of 1000-1400 nm.

Gray tracks are produced when a crystal is subjected to high power, high repetition rate laser pulses or CW laser irradiation. The gray tracks occur due to induced color centers in the KTP crystal that have broad optical absorption in the visible and near infrared wavelengths, especially at 532 nm. The process of the gray track formation is cumulative and leads to deterioration of harmonic conversion.

---

### Advantages


- Average output power density at 532 nm up to 5 kW/ cm<sup>2</sup> according to laser regime
- Nonlinear coefficient 4 times higher than LBO
- Low absorption at visible and near infrared wavelengths
- Broad temperature bandwidth
- Non-hygroscopic material
- Small walk-off and wide angular bandwidth

### Common Applications


Medium power green lasers for medical, industrial, scientific and other applications



## Comparison of Gray - Tracking Effect in KTP Crystals @1064nm absorption growth under 10 KW/cm<sup>2</sup> of green light @532

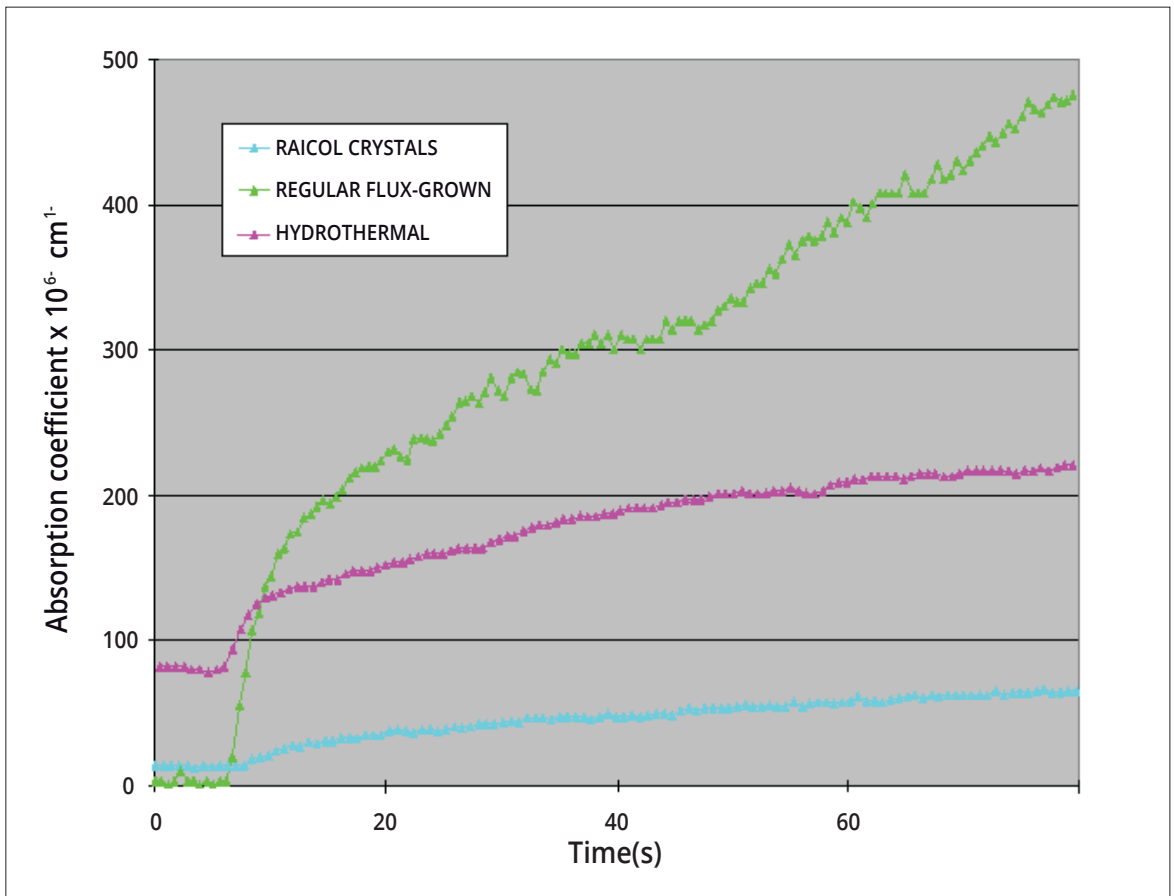


## HGTR KTP GRIIRA Graph

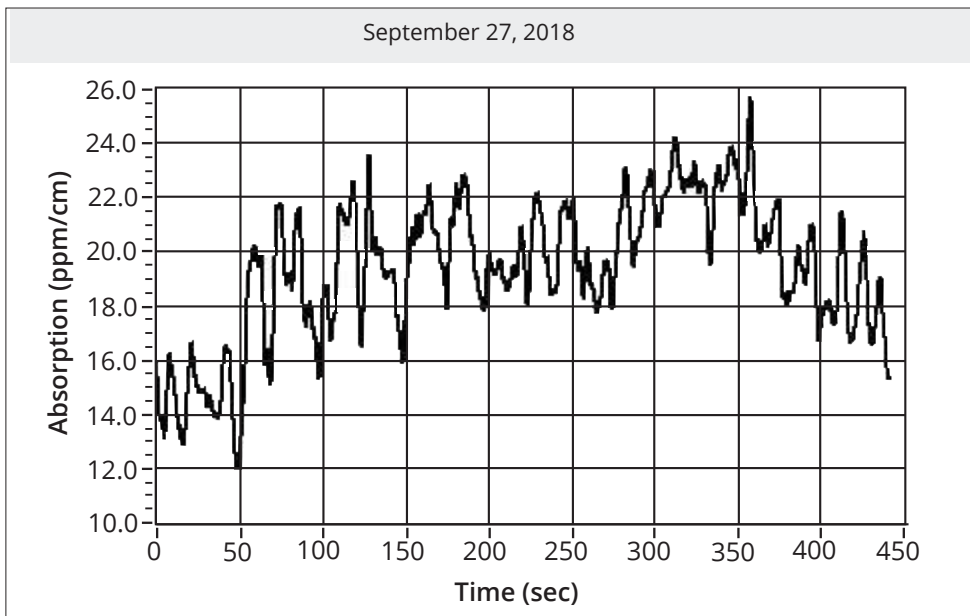

Time dependent dynamics of absorption in the crystal bulk @532 nm-radiation under self-radiation (532nm). This parameter indicates the effectiveness and gray tracking resistance of the crystals. This suggests the crystal's life time - the smaller the value, the longer the expected lifetime.

## HGTR KTP Coating Absorption Graph @1064

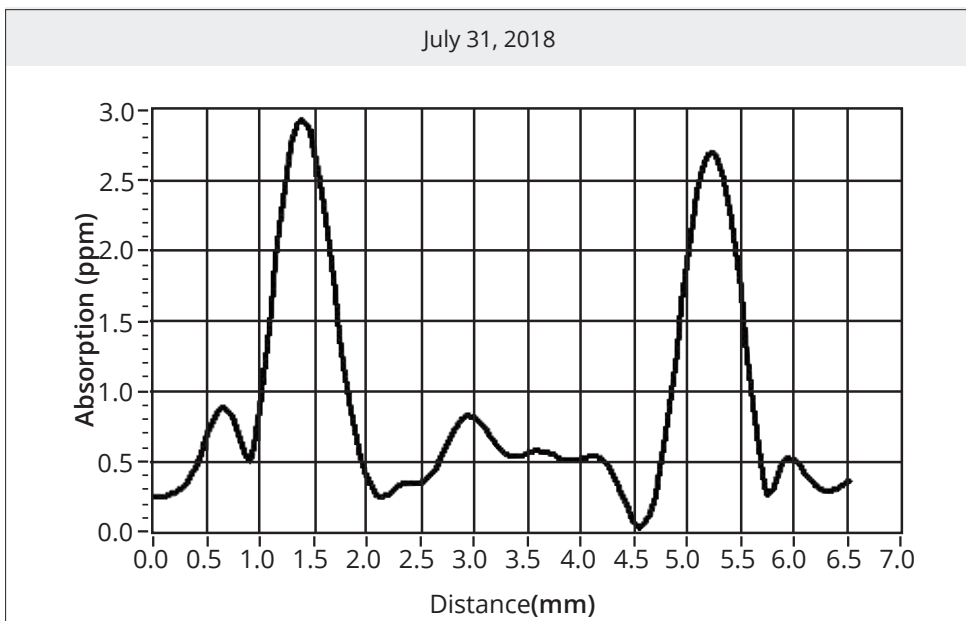

# KTP Types

## Specifications Comparison:

	<b>KTP</b>	<b>KTP OPO</b>	<b>HGTR</b>
Aperture	50x50 mm <sup>2</sup>	50x50 mm <sup>2</sup>	50x50 mm <sup>2</sup>
Orientation	< 20 arc min	< 20 arc min	< 20 arc min
Absorption Coefficient	<10 ppm/cm @ 1064 nm; <50 ppm/cm @ 532 nm	<10 ppm/cm @ 1064 nm; <50 ppm/cm @ 532 nm	<10 ppm/cm @ 1064 nm; <50 ppm/cm @ 532 nm
Length	Up to 40 mm	Up to 40 mm	Up to 40 mm
Flatness	$\lambda/10$ @ 633 nm	$\lambda/10$ @ 633 nm	$\lambda/10$ @ 633 nm
Wavefront distortion	$\lambda/4$ @ 633 nm	$\lambda/4$ @ 633 nm	$\lambda/4$ @ 633 nm
Perpendicularity	< 10 arc min	< 10 arc min	< 10 arc min
Laser Induced Damage Threshold	600 MW/ cm <sup>2</sup> @ 1064 nm, for 10 ns pulses, 10 pps	600 MW/ cm <sup>2</sup> @ 1064 nm, for 10 ns pulses, 10 pps	600 MW/ cm <sup>2</sup> @ 1064 nm, for 10 ns pulses, 10 pps
Parallelism	30 arc sec	30 arc sec	30 arc sec
AR Coating	DBAR	DBAR	DBAR
Scratch/Dig	10/5	10/5	10/5

# PPKTP

## Periodically Poled KTP




Periodically Poled KTP (PPKTP) is a unique type of nonlinear material that is based on quasi-phase matching (QPM). It can be tailor-made for all nonlinear applications within the transparency range of KTP, without the phase matching limitations of birefringent matching used in regular KTP interactions. Its effective nonlinear coefficient is about three times larger than that of bulk KTP.

Raicol has more than 20 years experience in developing and manufacturing PPKTP for various applications. The company pioneered an original manufacturing process that has allowed reliable supply of PPKTP over the years. Raicol offers PPKTP in large production quantities, as well as small quantities for R&D activities.

### Advantages


- Highest nonlinear coefficient
- Free of Walk-Off
- Large quantities for OEM mass-production as well as small quantities for R&D
- Broad phase-matching range
- Type 0 or type II interaction

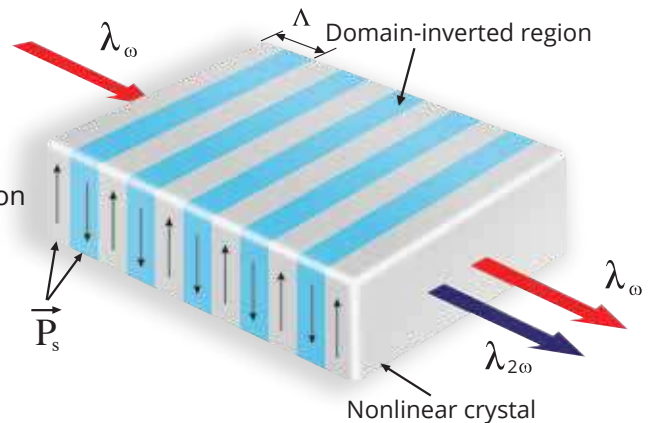

### Common Applications

SHG, SFG, DFG, and OPO applications from visible up to mid IR, SPDC for Quantum applications



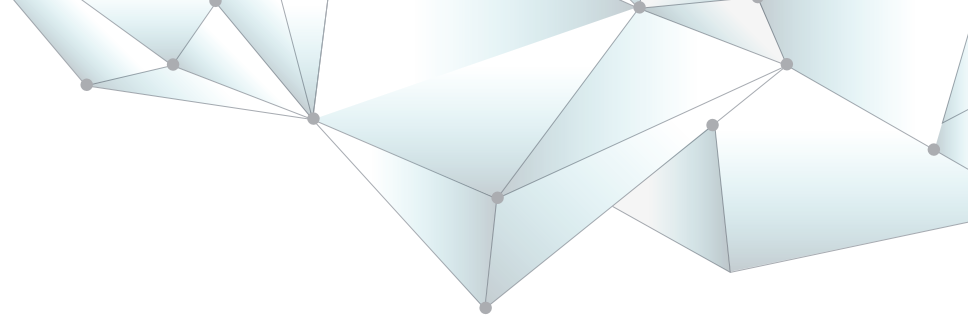

## The leading crystal for quantum applications

For more than 20 years, Raicol has been deepening its unique know-how in the manufacture of quasi phase-matched ppKTP crystals. By controlling the complete manufacture process, from the growth of the crystal to its periodic poling, Raicol fine-tuned its products to accommodate the needs of the quantum industry. In recent years, Raicol Quantum has worked alongside academic partners to optimize the ppKTP crystals as sources of entangled photon pairs and heralded single-photons for quantum-key distribution, computing, sensing, imaging and more.

### Raicol's ppKTP and apKTP crystals are prominent SPDC sources for:

- Entanglement with high spectral purity
- Polarization entanglement
- Squeezed light
- Broadband/narrowband type-0 and type-2 down conversion

## Typical Specifications for PPKTP

Transparency Range:	350-4000 nm
Length:	Up to 30 mm
Standard Aperture*:	1×2 up to 1X10 mm <sup>2</sup>
Operating Temperature	Near room temperature / Per request
Coating Options:	Extra/Intra cavity, AR/AR, AR/HR, DBAR, TBAR, IBS
Laser Induced Damage Threshold	600 MW/cm <sup>2</sup> @1064 nm, for 10 ns pulses

\*Custom apertures are available upon request

# BBO

## Crystals and EO Cells

Beta-barium borate (BBO) is a versatile nonlinear crystal ideally suited for nonlinear laser interactions.

BBO crystals combine very wide transparency, high nonlinear coupling, high damage threshold and good chemical and mechanical properties. BBO phase matches over a wide range, yielding SHG, SFD and OPO from 190 to 1780 nm.

---

### Advantages

- Very wide transparency range
- High damage threshold
- High nonlinear coefficient
- High optical homogeneity
- Wide temperature-bandwidth

### Common Applications

- Second, third, fourth, and fifth harmonic generation of ND: YAG lasers
- Second, third, and fourth harmonic generation of Ti: Sapphire and Alexandrite lasers
- SHG of Argon, Cu Vapor and Ruby lasers
- OPO of UV and visible wavelengths
- Electro optical cells






## Typical Specifications for BBO

Aperture	Up to 15x15 mm <sup>2</sup>
Length	Up to 30 mm
Flatness	Up to $\lambda/10$ @633nm
Perpendicularity	Up to 5 arc min.
Parallelism	Up to 5 arc sec.
Scratch/Dig	10/5
AR Coatings	AR/AR, DBAR dual band R < 0.2 %
Absorption Coefficient	< 50ppm cm <sup>-1</sup> @1064nm < 100ppm cm <sup>-1</sup> @532nm
Wave Front Distortion Control	$\lambda/8$ @633nm
Guaranteed Laser Induced Threshold	1 GW/cm <sup>2</sup> @1064 nm 500 MW/cm <sup>2</sup> @532 nm For 10 ns pulses



**Israel office:**

22 HaMelacha St., Rosh HaAyin, Israel  
+Tel. +972 - 3 - 9367412 | +Fax. +972 - 3 - 9068969  
Email: [info@raicol.com](mailto:info@raicol.com)  
 Join us on LinkedIn

**Europe office:**

Sales Director Europe  
Mr. Harald Friedel  
e-mail: [Harald.Friedel@Raicol.com](mailto:Harald.Friedel@Raicol.com)

**US office:**

Sales Director, North America  
Mr. Guy Gavish  
e-mail: [Guy.Gavish@Raicol.com](mailto:Guy.Gavish@Raicol.com)

**[www.raicol.com](http://www.raicol.com)**

